




Systèmes de sécurisation pour travail en hauteur

Crochets, Cordons, Pochettes, Holsters, Ceintures,
Bracelets, Boucles, Anneaux,
Attachements universels.



LANYARDS

Improved Label Information





Lanyards

Stock No.	Description	Load Rating lbs (kgs)	Extension Length inches	Retracted Length inches	Qty.
PYT1500051	Carabiner to Loop Web Lanyard, Heavy-Duty	80 (36)	72	N/A	1
PYT1500052	Carabiner to Rail Hook Web Lanyard, Heavy-Duty	80 (36)	72	N/A	1
PYT1500050	Carabiner to Loop Web Lanyard, Medium Duty	35 (16)	72	N/A	1
PYT1500049	Carabiner to Loop Bungee Lanyard, Medium Duty	35 (16)	49	30	1
THCARA30A	SST Carabiner to Carabiner Bungee Lanyard, Medium Duty	30 (14)	40	18	1
THCARA25A	SST Carabiner to Carabiner Bungee Lanyard, Medium Duty	25 (11)	124	37-45	1
THCARA257FTB	SST Carabiner to Carabiner Bungee Lanyard, Medium Duty	25 (11)	78	32	1
THCARA15SL	SST Carabiner to Carabiner Bungee Lanyard, Standard Duty	15 (7)	47	27	1
THUNI25A	SST Carabiner to Loop Bungee Lanyard, Standard Duty	15 (7)	50	30	1

















Lanyards and Anchor Straps

Stock No.	Description	Weight Rating	Extension Length inches	Retracted Length inches	Qty
PYT1500048	Carabiner to Loop Bungee Lanyard, Standard-Duty, 10pk	10 lbs.	47"	31"	10
THCARA257FR	Lanyard with 2 - SST Carabiners	25 lbs.	78″	32"	1
THCARA257A	25 lb Lanyard 2SST Carabiner 7'	25 lbs	78″	32"	1
THUNI15SL	Lanyard - Loop to Self-Locking Carabiner	15 lbs	48"	27"	1
THUNI5SL	Lanyard Web Loop, 5 lb	15 lbs	53"	33"	1
THL1A	Universal Tether with Carabiner and Loop	5 lbs	14"	N/A	1
THL2A	Universal Tether with 2 SST Carabiners	5 lbs	14"	N/A	1









Wear appropriate eye protection
Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.
Do not exceed load rating
Read safety precautions on pages W1 to W4




TETHERS



Coil Tethers

Stock No.	Description	Load Rating lbs (kgs)	Extension Length inches	Retracted Length inches	Qty
PYT1500059	Clip to Clip Tether, Personal Duty	2 (1)	44"	9"	10
PYT1500060	Clip to Side Release Loop Tether, Personal Duty	2 (1)	45.25"	10"	10
PYT1500062	Clip to Loop Hard Hat Tether, 100pk	2 (1)	44-1/2"	12"	1
PYT1500065	Carabiner to Quick Ring Tether, Personal Duty	2 (1)	65.5"	25"	10
PYT1500066	Carabiner to Quick Ring Tether, Personal Duty	2 (1)	65.5"	25"	1
PYT1500067	Trigger to Trigger Tether, Personal Duty	5 (2)	30"	9"	10
PYT1500068	Trigger to Trigger Tether, Personal Duty	5 (2)	30"	9"	10
PYT1500159	2 Carabiner Coil Tether with Swivel	5 (2)	67.5"	16.5"	10
PYT1500160	Safe Bucket Hook and Loop	250 (113)	N/A	N/A	100

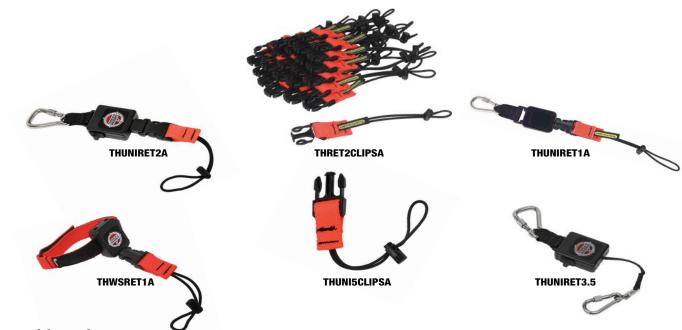

Retractable Tethers

Stock No.	Description	Load Rating lbs (kgs)	Extension Length inches	Retracted Length inches	Qty
THUNIRET2A	2 LB Retractable Lanyard	2 (1)	42"	17"	1
THRET2CLIPSA	Disconnectable Clips/Loop for THUNIRET2A, 10pk	2 (1)	N/A	8"	10
THUNIRET1A	Self Flushing Retractable Tether with Disconnectable Loop	1 (.5)	36"	14"	1
THRET1CLIPSA	Disconnectable Clips/Loop for THUNIRET1A and THWSRET1A, 10pk	1 (.5)	N/A	7-3/4"	10
THWSRET1A	Personal Duty Retractable Tether	1 (.5)	49"	10"	1
THUNI5CLIPSA	Disconnectable Clips/Loop, 10 Pack	5 (2)	N/A	-	10
THUNIRET3.5	3.5 LB Retractable Lanyard	3.5 (1.5)	55"	11.75"	1

N244



Hard Hat Tethers

- Retractor provides a lower-profile and more comfortable method of hard hat tethering

 • Weight Rating: 1lb. 2oz.

 • Looped end cinches around hard hat

- Spring clip attaches to clothing or vest to secure hat

Stock No.	Weight Rating	Retracted Length inches	Extension Length inches
THHARDHAT1	1 lb 2 oz	N/A	16"
THHARDHAT2	1 lb 2 oz	N/A	14"



- Pullaway Wristbands
 Designed so that they can be escaped from in emergency situations
- Feature an elastic strap that conform to the users wrist size automatically

Stock No.	Size	Load Rating, lbs. (kg)	Qty
PYT1500070	Small	5 (2)	1
PYT1500071	Small	5 (2)	10
PYT1500072	Medium	5 (2)	1
PYT1500073	Medium	5 (2)	10
PYT1500074	Large	5 (2)	1
PYT1500077	Slim / Small	5 (2)	10
PYT1500079	Slim / Medium	5 (2)	10
PYT1500081	Slim / Large	5 (2)	10
PYTWBL10PK	Large	5 (2)	10





PYT1500077









Adjustable Wristbands
• Adjustable Wristbands can be sized to virtually any wrist size with Hook and Loop closure straps

	•	
Stock No.	Load Rating lbs (kgs)	Qty
THWSNC	5 (2)	1
PYT1500083	5 (2)	10
PYT1500085	5 (2)	10
PYT1500087	1.5 (.7)	10
THWSRET1A	1 (.5)	1
THWS1A	5 (2)	1

Tools not included with Wristbands











- Wear appropriate eye protection
 Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
 Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.
 Do not exceed load rating
 Read safety precautions on pages W1 to W4



HOLSTERS





PYT1500091



PYT1500094



PYT1500102



PYT1500103



PYT1500105



PYT1500107



PYT1500108



PYT1500095



PYT1500096





PYT1500069

Tool Holsters

Stock No.	Description	
PYT1500088†	Adjustable Radio Holster	
PYT1500089	Adjustable Radio Holster Combo (Includes EXT-C2LCOIL)	
PYT1500091	Bottle / Spray Can Holster	
PYT1500092	Bottle / Spray Can Holster Combo (Includes EXT-C2CCOIL)	
PYT1500093	Hammer Holster Belt	
PYT1500094	Hammer Holster Combo (Includes EXT-H2QRCOIL)	
PYT1500101	Single Tool Belt Holster	
PYT1500102†	Single Tool Belt Holster with Retractor	
PYT1500103	Single Tool Harness Holster	
PYT1500104†	Single Tool Harness Holster with Retractor	
PYT1500105	Extra-Deep Single Tool Holster	

^{*} Lanyards not included with Tool Holsters unless otherwise stated.
** Tools not included with Tool Holsters.
†Patent Pending

Stock No.	Description
PYT1500106	Dual Tool Belt Holster
PYT1500107†	Dual Tool Holster Pouch w/2 Retractors
PYT1500108	Dual Tool Harness Holster
PYT1500109†	Dual Tool Harness Holster with Retractors
PYT1500095†	Measuring Tape Pouch w/Retractor
PYT1500096†	Scaffold Wrench Holster Belt with Retractor
PYT1500097	Scaffold Wrench Holster with Retractor Combo (Includes EXT-H2LBUNGEE)
PYT1500098†	Tape Measure Holster with Retractor
PYT1500099†	Tape Measure Sleeve
PYT1500100	Tape Measure Holster with Retractor Combo (Includes HOL-TAPESLEEVE)
PYT1500069	52" Steel Cable Retractor with Polycarbonate Body



Small Parts Pouch

- Patented Small Parts Pouch stops accidental drops with an innovative self-closure system that traps objects inside making it nearly impossible for objects to fall out once placed in the bag
- Easy to retrieve objects since no opening or closing is necessary
- Available in several colors, and a vinyl variant
- · Extra-deep Small Parts Pouch is also convenient for extra storage space

Stock No.	Description	
PYT1500119	Small Parts Pouch - Canvas Black	
PYT1500120	Small Parts Pouch - Canvas Camo	
PYT1500121	500121 Small Parts Pouch - Canvas Orange	
PYT1500122	Small Parts Pouch - Vinyl Yellow	
PYT1500123 Small Parts Pouch Extra-Deep - Canvas Bla		





PYT1500132

Utility Pouch PYT1500132

- Two welded D-Rings on front of pouch to tie off tools; One additional D-Ring inside pouch
- Two inner pouch pockets for storing tools; Belt loop on back of pouch
- Two side ears are perfect for holding spud wrenches and sleever bars
- Drain vent on the bottom of the pouch

Inspection Pouch PYT1500131

- Designed for the safe transport and use of most multimeters, air monitors, and other portable testing devices
- Three tool pockets inside the pouch are perfect for tools and testing probes
- Tools can be tied off to a D-ring inside the pouch, or a D-ring located on either side of the back of the pouch
- Designed to be worn off the belt or over the shoulder strap (shoulder strap included)



Tool Pouches

Stock No.	Description	
PYT1500124	Tool Pouch with D-Ring	
PYT1500125	Tool Pouch with D-Ring and Retractors	
PYT1500126	Tool Pouch with D-Ring and Triggers	
PYT1500127	127 Extra Deep Tool Pouch with D-Ring	
PYT1500128	Extra Deep Tool Pouch with D-Ring and Retractors	
PYT1500129 Extra Deep Tool Pouch with D-Ring and Trigger		











Wear appropriate eye protection
Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.
Read safety precautions on pages W1 to W4



PYT1500124



- A drop prevention tool belt system that's both durable and comfortable
- Modular design allowing the user to customize their own personal holster and pouch set up

Stock No.	Description	Waist Size inches
PYT1500110	Comfort Belt S-M	28" - 36"
PYT1500111	Belt L-XL	36" - 44"
PYT1500112	Belt 2X - 3X	44" - 52"



Utility Belts

Comfort Tool Belts

• Features a high strength grommet closure system with padding inside two layers of Cordura® that provides for durability and comfort

Stock No.	Waist Size inches	
PYT1500113	28" - 46"	
PYT1500114	40" - 54"	



Belt Loops

- Compatible with all tool belts above
- · Attachment creates an instant attachment point that is third-party load-rated for 5 lbs.
- Creates an instant staging point that is third-party load-rated for 5 lbs.
- Thumb release steel trigger snap allows for quick tool transfers while maintaining a secure connection, even while wearing work gloves
- Modular design allowing the user to customize their own personal holster and pouch set up

Stock No. Description		Load Rating, lbs. (kg)	Qty
PYT1500116 Belt Loop D-Ring		5 (2)	1
PYT1500118 Belt Loop Trigger		5 (2)	10
THBL1	Belt Loop with Loading Ring	5 (2)	1



Safe Buckets

- Manufactured with either a hook and loop or drawstring closure system which helps prevent accidental drops
 • All Safe Buckets are third-party load rated
- Sewn into the bottom of every Safe Bucket is hard composite plating that protects the bucket from accidental punctures
- Protective leather sleeve covers the inserts that are resilient to the elements and harsh work environments
- Engineered to be used with tools at height, and includes multiple connection points that can be tethered to; Workers can tether their tools directly to the Safe Bucket when being used, and store their tools for transport when finished
- Instead of rope which is susceptible to fraying, a heavy-duty hoisting/shoulder strap is built into every Safe Bucket
- · Equipped with a high-quality and lightweight aluminum twist-lock carabiner load rated for 30 kN (6,700 lbs); No need to worry about a knot failing, or a non-locking carabiner which may slip off a connection point
- 15 inches tall and have a 12.5-inch diameter



PYT1500134

Stock No.	Description	Closure System	Body Material	Load Rating lb (kg)
PYT1500134	Lift Bucket 100lb Canvas H/L	Hook and Loop	Canvas	100 (45)
PYT1500133 Canvas Lift Bucket w/ Drawstring Closure, 100lb Capacity		Drawstring	Canvas	100 (45)
PYT1500140	Vinyl, Hook and Loop Bucket	Hook and Loop	Vinyl	250 (113)
PYT1500139	Vinyl, Drawstring Bucket	Drawstring	Vinyl	250 (113)

Bucket Insert with Pockets PYT1500141

- Hard Body Safe Bucket Insert converts the standard soft body Safe Bucket into a hard body bucket
- Four inner pockets for staging tools and small parts
- Insert can be removed and reused and is compatible with all standard Safe Buckets

Tools not included



PYT1500141

Extra Deep Safe Buckets

- Hook and loop closure system allows for the safe transport of scaffold poles and large tools, like torque wrenches
- · Available in three different lengths
- Third-party load rated for 100 lbs.
- · Heavy-duty webbing hoisting strap comes with a built in twist-lock aluminum carabiner for lifting

Stock No.	Length inches	Load Rating lb (kg)
PYT1500136	48	100 (45)
PYT1500137	72	100 (45)
PYT1500138	120	100 (45)









Wear appropriate eye protection
Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.
Read and follow all specific instructions
Read safety precautions on pages W1 to W4





PYT1500136

I = I





Tool Cinch Attachments

 Patent-pending Tool Cinch Attachment Points are thirdparty load rated for 35 pounds

 The PYT1500018 and PYT150016 feature stabilization wings that can be taped down using Quick Wrap Tape to create a secure connection that won't slide off a tool

 With a Tool Cinch, it's possible to create attachment points on heavy, difficult to tether tools and equipment

 PYT1500012 is perfect for tools with closed handles or pre-drilled holes

Built-in battery life indicator, so you will know your light's battery level before you go in, is designed to be used with tools that do not have pre-drilled holes or closed handles. It can even be used on tools with triggers such as grinders, bandsaws, or drills

 PYT1500015 is intended to be used on long cylindrical tools where there is at least 5.5 inches of space available for the stabilization wings to be taped down

Stock No.	Description	Max Load lbs.	Quantity
PYT1500012	Tool Cinch Medium Duty	35	10
PYT1500014	Tool Cinch Single Wing Medium Duty	35	10
PYT1500016	Tool Cinch Dual Wing Medium Duty	35	10
PYT1500018	Tool Cinch Heavy-Duty	80	10



- D-Rings combined with Quick Wrap Tape can create attachment points on tools that are otherwise impossible to tether.
- The non-conductive variant also available (PYT5225N)
- Third-party load rated for 5 pounds and 2 pounds

Stock No.	Description	Weight Rating	Maximum Tether Length
THAPCINCH15	Attach Point with SST, 15 lb	15 lbs	6 Feet
THAPLOOP10	Attach Point Load Ring with Corded Loop, 10 lb	10 lbs	6 Feet
THAPSST10 Attach Point with SST, 10 I		10 lbs	6 Feet
THAPSST5	Attach Point with SST Load Ring, 5 lb	5 lbs	6 Feet
THAPSWIV5	Attach Point with SST, 5 lb	5 lbs	6 Feet



Quick Spins

- The unique, patented Quick Spins accommodate a wide selection of tools, making them tether-ready in seconds
- Reusable, and suitable for non-conductive use, the tangle-resistant spin tops make Quick Spins an outstanding drop prevention solution that doesn't deface tools
- The body is made from a Thermoplastic Rubber and Polyester material (TPU), the spin tops are made of polyacetal and black carbon (POM)

Stock No.	Diameter inches	Load Rating (Pounds)	Quantity
PYT1500027	0.6	1, .5	10
PYT1500028	0.8	1, .5	10
PYT1500029	1	1, .5	10
PYT1500030	1.2	1, .5	10
PYT1500031	0.3	Not Rated	10
PYT1500032	0.3	Not Rated	10
PYT1500033	0.5	Not Rated	10



D-Rings

- D-Rings combined with Quick Wrap Tape can create attachment points on tools that are otherwise impossible to tether.
- The non-conductive variant also available (PYT5225N)
- Third-party load rated for 5 pounds and 2 pounds

Stock No.	Description	Quantity
PYT1500003	D-Ring 0.5" X 2.25"	10
PYT1500004	D-Ring 0.5" X 2.25"	100
PYT1500005	D-Ring 0.5" X 2.25" Non-Conductive	10
PYT1500006	PYT1500006 D-Ring 0.5" X 2.25" Non-Conductive	
PYT1500007	D-Ring 1" X 3.5"	10
PYT1500008	D-Ring 1" X 3.5"	50



Quick Wrap Tape

- Quick Wrap Tape is made from self-fusing silicone rubber and features inner fiberglass webbing reinforcement.
- Quick Wrap Tape is intended to be used with D-Rings and Tool Cinch Attachment Points.

Stock No.	Length inches	Quantity	Width inches	Color
PYT1500169	108	10	1	Blue
PYT1500175	108	10	1	Yellow



Micro D-Ring

- Micro D-Ring is an attachment point that can be used on small tools and equipment that are otherwise not possible to tether
- DR-MICRO is a flexible piece of ballistic plastic that can conform to the shape of many objects
- Industrial grade double-sided adhesive tape sticks to the bottom of the Micro D-Ring, allowing it to be attached to a clean surface

Stock No.	Quantity
PYT1500010	10



Tape is always used with D-Rings and cinches. Heat Shrink is added to make a more durable surface

Heat Shrink

- Heat Shrink is used to create an even stronger connection that is more resistant to abrasives and harsh environments
- Links shrink 300% in size, while an inner adhesive securely fastens itself to whatever is being wrapped.

Stock No.	Length inches	Diameter inches	Quantity
PYT1500019	1.75	0.75	25
PYT1500020	1.75	1	25
PYT1500021	2	1.5	25
PYT1500022	4	2	10
PYT1500023	4	3	10

Tools not included



D-Ring Cord

• Easily cinches to tools weighing under 5 lbs., creating an instant attachment point for many tools

[Stock No.	Load Rating, lbs.	Quantity	
Ì	PYT1500009	5	10	

Tools not included



PYT1500090

Universal Battery Holster for Cordless Tools

- 10 lb capacity
- Holster is adjustable to fit most 18 and 20V cordless tool batteries
- Cinch is used to create an attachment point for tool lanvards
- Fits most 18V and 20V cordless tool batteries

Stock No.	Description
PYT1500090	Universal Battery Holster for Cordless Tools


Tool lanvards not included with tool holsters unless otherwise stated. Tools not included with tool holsters.











Wear appropriate eye protection
Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.
Do not exceed rated capacity
Read safety precautions on pages W1 to W4





Nous contacter:



